

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



10/529222




(43) International Publication Date
6 May 2004 (06.05.2004)

PCT

(10) International Publication Number
WO 2004/038154 A1

- (51) International Patent Classification⁷: **E06B 3/46** (74) Agent: AWAPATENT AB; Box 5117, 200 71 Malmö (SE).
- (21) International Application Number: PCT/SE2003/001527 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 2 October 2003 (02.10.2003)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:
0203115-1 23 October 2002 (23.10.2002) SE
0203455-1 22 November 2002 (22.11.2002) SE
- (71) Applicant (*for all designated States except US*): NORDISKA BALCO AB [SE/SE]; Älgvägen 4, S-352 45 Växjö (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): BJÖRKMAN, Lars [SE/SE]; Granebovägen 19, S-352 60 Växjö (SE). LJUNG, Rune [SE/SE]; Storgatan 3, S-263 37 Höganäs (SE). LIND, Ulf [SE/SE]; Osavägen 25, S-263 71 Jonstorp (SE).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: SLIDING WINDOW ARRANGEMENT

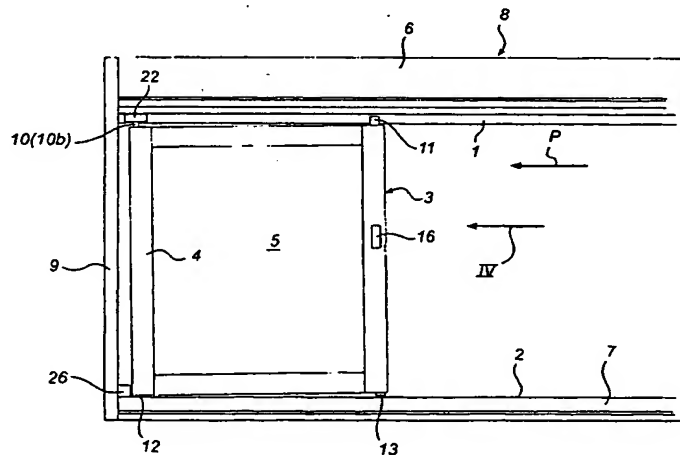

(57) Abstract: A sliding window arrangement has an upper and a lower horizontal guide rail (1, 2) and a vertical rectangular window (3) which is mounted between the guide rails and displaceable along the same. The window (3) has at each upper corner a guide means (10, 11) which engages the upper guide rail (1), and at each lower corner a guide means (12, 13) which engages the lower guide rail (2). The lower guide rail (2) has a stop means (26) which is positioned so that the window (3), when on displacement towards a displacement end position it reaches this position, abuts against the stop means (26) in its lower front corner and, owing to its kinetic energy, is tilted to a tilted position about an imaginary tilt axis extending perpendicular to the window (3). In the tilted position, the guide means (13) located in the lower rear corner of the window (3) is disengaged from the lower guide rail (2). The window (3) has an operating means (16), by means of which the guide means (11) located at the upper rear corner of the window (3) is disengageable from the upper guide rail (1) to allow the window (3) in the tilted position to be pivoted about a vertical pivot shaft placed at the front lateral edge of the window, from a closed position to an open position.

WO 2004/038154 A1